



MATERIAL MUST BE ACCORD WITH RoHS STANDARD


版本 REV.	变更内容 DESCRIPTION	变更号 ECN No.	日期 DATE
1.0	ISSUE	REL	2020-03-26

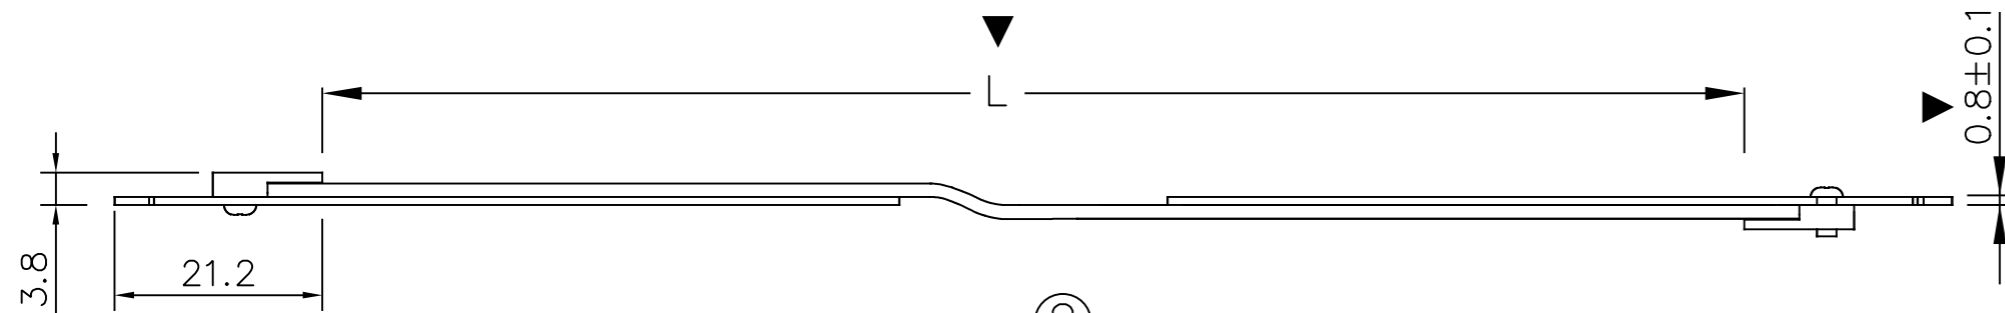


NOTE
 1.100% PCIe 3.0x4 32Gb/s TEST.
 2.DIMSION MARK "▼" BY QC CHECK.

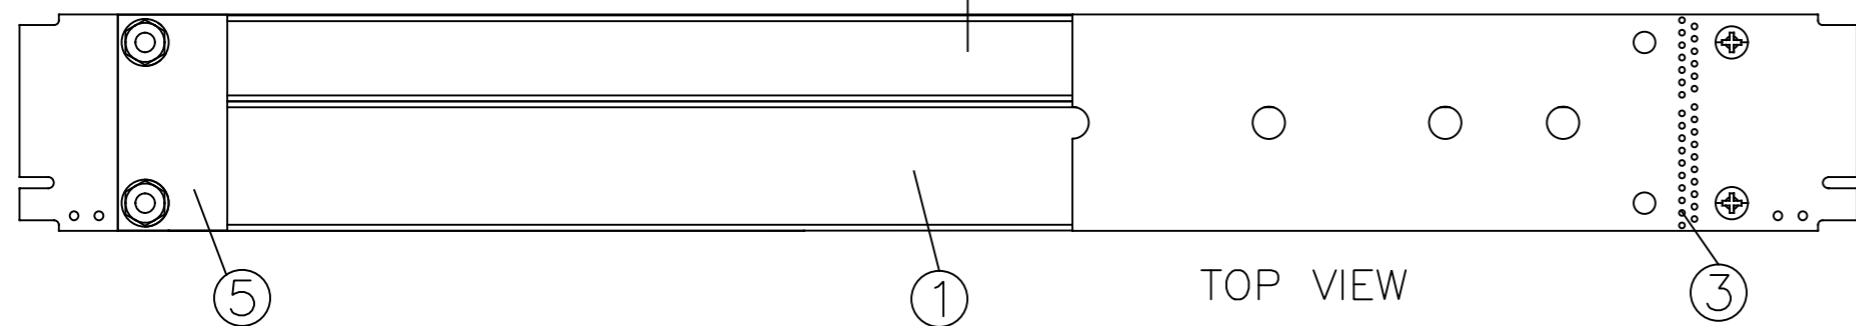

TOP VIEW

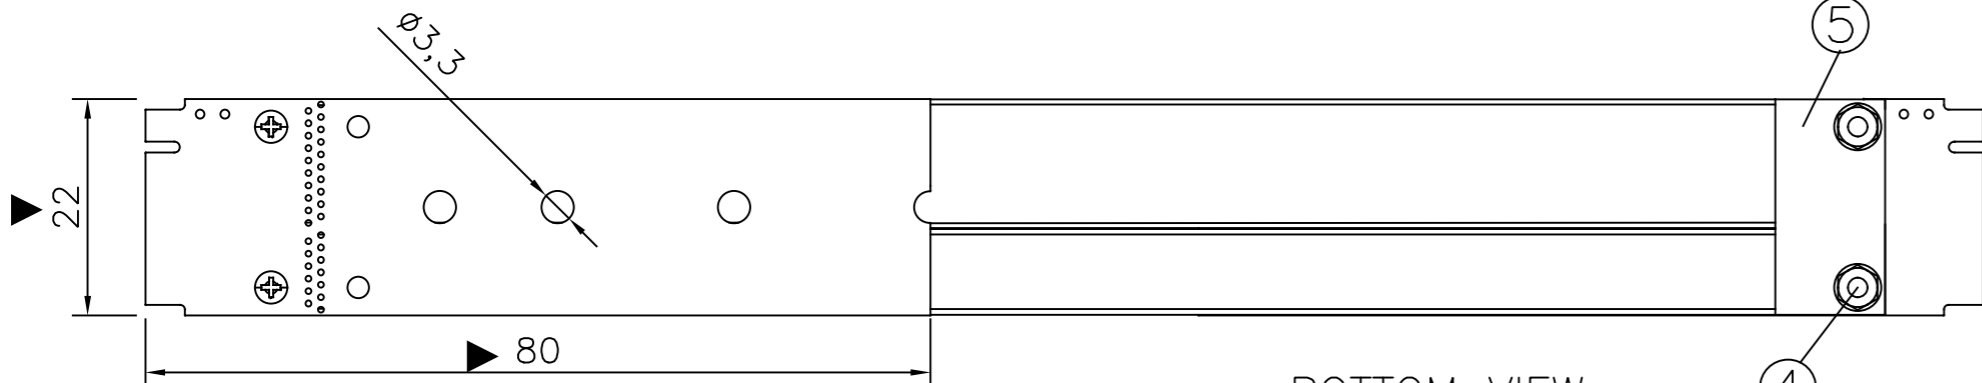

BOTTOM VIEW

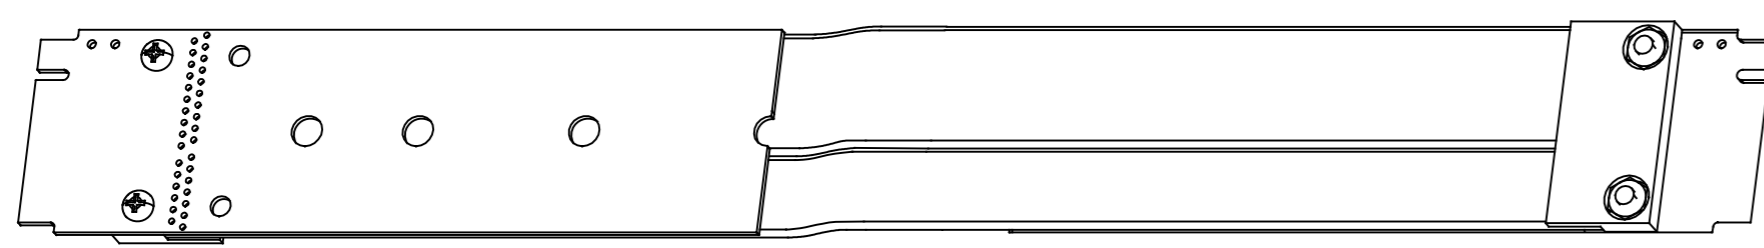

3D VIEW

R44SS-10cm	100±5
R44SS-15cm	150±5
R44SS-17cm	170±5
R44SS-17.5cm	175±5
R44SS-20cm	200±10
R44SS-25cm	250±10
R44SS-30cm	300±20
R44SS-40cm	400±20
R44SS-50cm	500±20
R44SS-80cm	800±30
Part-Number	Length (mm)

ADT-LINK

5	PAD	3mm thickness FR4 PCB PAD	2Pcs
4	Screw	M2 screw & hex nut	4Set
3	Tape	Acetate cloth tape	1Pcs
2	CABLE	HIGH SPEED FLAT CABLE,(WIRE13P=30AWG×8P,28AWG×5P),PE JACKET:BLACK,OD=1.05×8.8mm (95±15Ω),TPE	1Pcs
1	CABLE	HIGH SPEED FLAT CABLE,(WIRE20P=30AWG×12P,28AWG×8P),PE JACKET:BLACK,OD=1.4×13.2mm (95±15Ω),TPE	1Pcs
No.	PART NO.	DESCRIPTION	Q'TY

TITLE: M.2 NVME to M.2 NVME JUMPER CABLE L=10~80cm		DWG NO.: ADT-R4S-R4S-001	
		CUSTOMER NO.: ADT	
		CUSTOMER P/N: R44SS-xxxcm	
	SCALE NONE	UNIT mm	CUS REV. 1.0
		HY REV. 1.0	DATE 2020-03-26
			SHEET 1/1
DRAWING/制图		CHECKED/审核	
		APPROVED/核准	