




PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADT-LINK ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADT-LINK IS PROHIBITED

版本 REV	变更内容 DESCRIPTION	变更号 ECN No.	日期 DATA
1.0	ISSUE	REL	2024-Sep-25

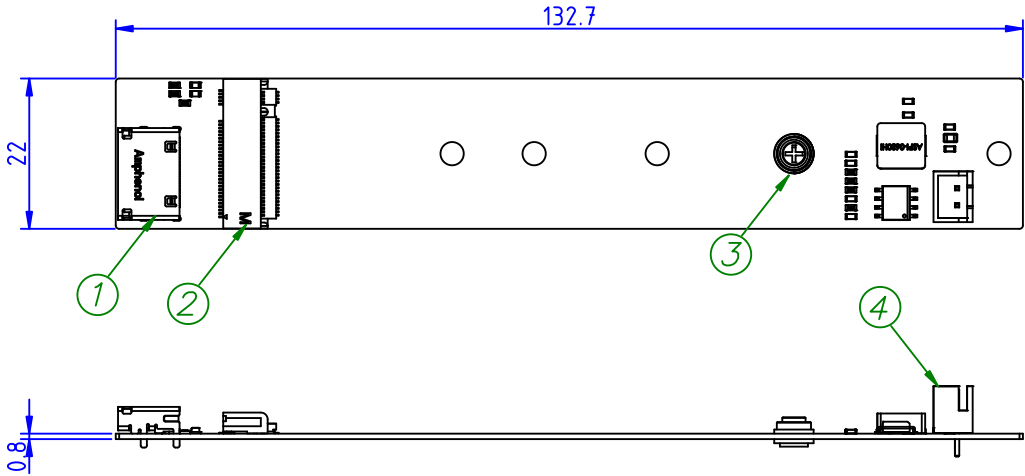

Top View

3D View

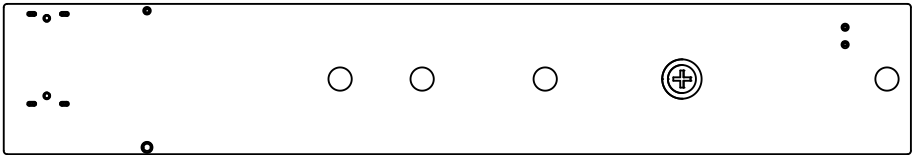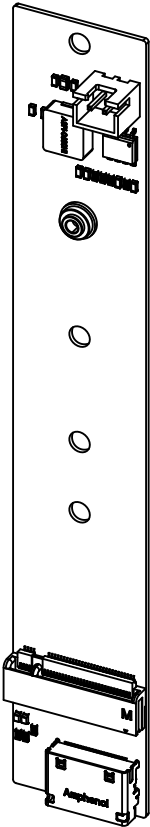

Bottom View

FEATURES:
SFF-8612 to M.2 NVME SSD Adpter
Specification: M.2 NVME
Bandwidth: 32Gbps (Max.)
Function: PCIe 4.0 x4


PHYSICAL PROPERTIES:
Operation Temp. Range: -40°C to 80°C
Flammability rating: 94V-0

NOTE
1.100% OPEN/SHORT TEST.
2.DIMSION MARK "▼" BY QC CHECK.



ADT-Link

4	Connector	2PIN 12V POWER CONNECTOR	1Pcs
3	Screw	M2 2280 screw	1Pcs
2	Connector	M.2 3.2H 67PIN 0.5mm Pitch, M key, SMT, Top-Mount , R/A H/F connector	1Pcs
1	Connector	SFF-8612 FEMALE CONNECTOR	1Pcs
No.	PART NO.	DESCRIPTION	Q'TY

ADT-Link							
TITLE: SFF-8612 to M.2 NVME SSD Adpter				DWG NO.: ADT-F4D-001			
				CUSTOMER NO. : F4D			
				CUSTOMER P/N: F4D			
		SCALE NONE	UNIT mm	CUS REV. 1.0	ADT REV. 1.0	DATE 2024-Sep-25	SHEET 1/1
DRAWING/制图 Liang			CHECKED/审核			APPROVED/核准	