


1 2 3 4 5 6 7 8

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADT-LINK ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADT-LINK IS PROHIBITED

版本 REV	变更内容 DESCRIPTION	变更号 ECN No.	日期 DATA
1.0	ISSUE	REL	2024-May-23

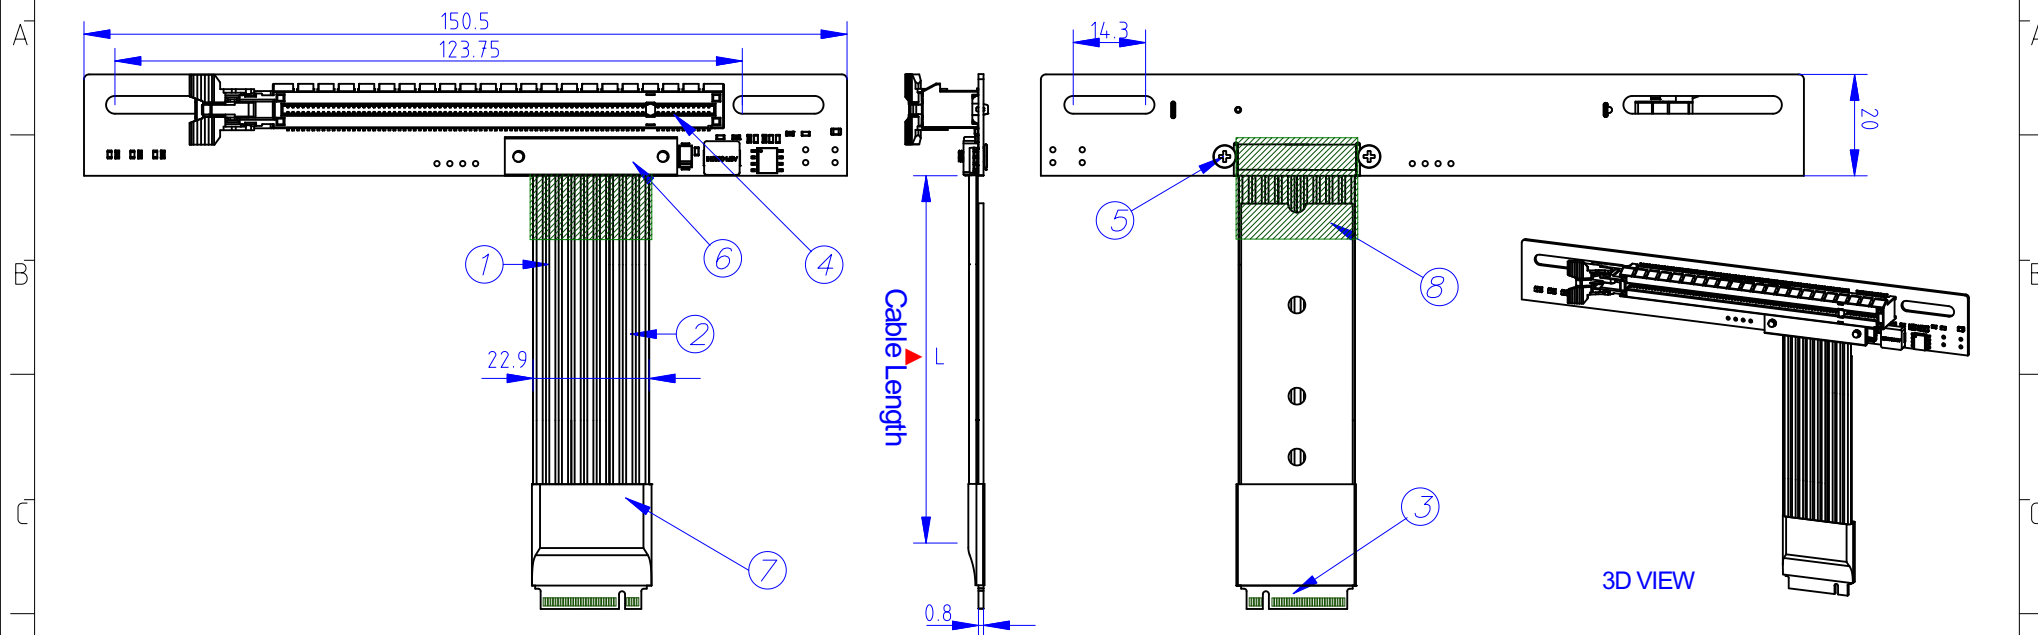

FEATURES:
PCIe x16 extension riser cable
Specification: PCIe x16 164p

PHYSICAL PROPERTIES:
Operation Temp. Range: -20°C to 80°C
PAIR Cable Flammability rating: FT2

ELECTRONIC CHARACTERISTICS:
Voltage Rating: 30V ac(r.m.s) Max.
Insulation resistance: Minimum 95MΩ-Km
Differential Impedance: 100Ω
Pair match impedance: ±25Ω

NOTE
1.100% OPEN/SHORT TEST.
2.DIMSION MARK "▼" BY QC CHECK



M4314-10CM	100±10
M4314-15CM	150±10
M4314-20CM	200±10
M4314-30CM	300±10
M4314-50CM	500±30
M4314-100CM	1000±30
Part-Number	Length (mm)

8	Tape	Acetate cloth tape	1Pcs
7	Tube	Heat shrink tube	1Pcs
6	PAD	Aluminum 2.8mm PAD	1Pcs
5	Screw	M2 screw	2Set
4	Connector	PCIe Gen 4,x16, 164PIN SMT,Black,HF	1Pcs
3	Edge PCB	PCIe X4 CARD EDGE PCB, Black,ON GOLD FINGER, UL 94V-0	1Pcs
2	CABLE	7.65*1.3mm TWIN-AX 30/28AWG*3PAIR CABLE, DIFF 100 Ohm,Silver	1Pcs
1	CABLE	15.3*1.3mm TWIN-AX 30/28AWG*6PAIR CABLE, DIFF 100 Ohm,Silver	1Pcs
No.	PART NO.	DESCRIPTION	QTY

ADT-Link						
TITLE: PCIe 4.0 M.2 NVMe to x16 Extension Flat CABLE			DWG NO.: ADT-M4314-001			
			CUSTOMER NO.: M4314-xxxxcm			
			CUSTOMER P/N: M4314			
SCALE NONE		UNIT mm	CUS REV. 1.0	ADT REV. 1.0	DATE 2024-May-23	SHEET 1/1
DRAWING/制图 Dane		CHECKED/审核		APPROVED/核准		