



MATERIAL MUST BE ACCORD WITH RoHS STANDARD



版本 REV.	变更内容 DESCRIPTION	变更号 ECN No.	日期 DATA
1.0	ISSUE	REL	2020-06-26

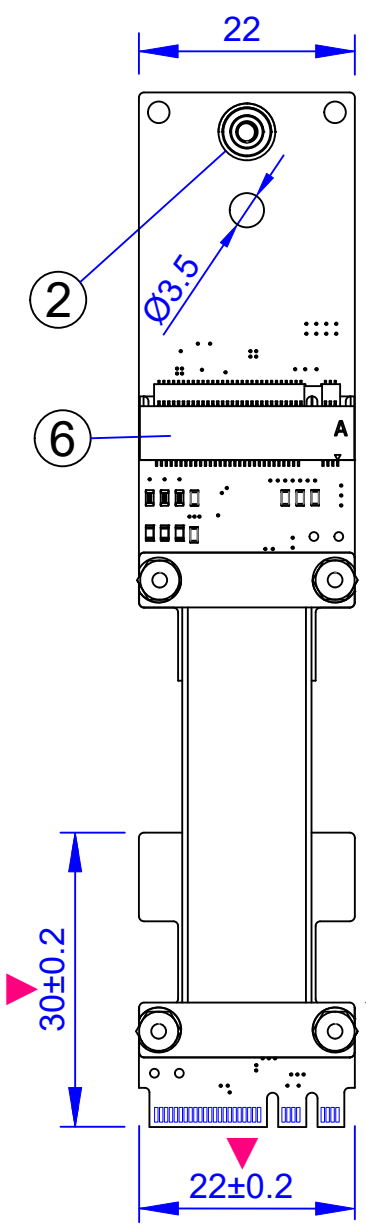

TOP VIEW

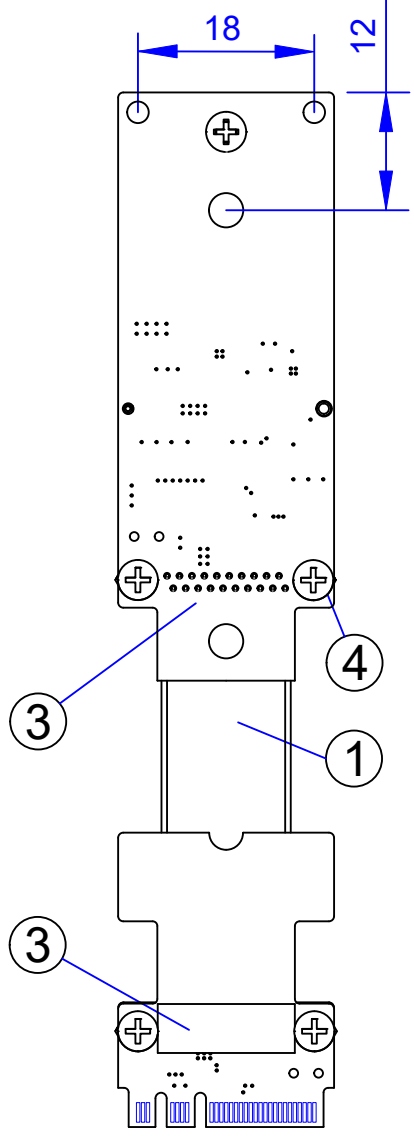


BOTTOM VIEW

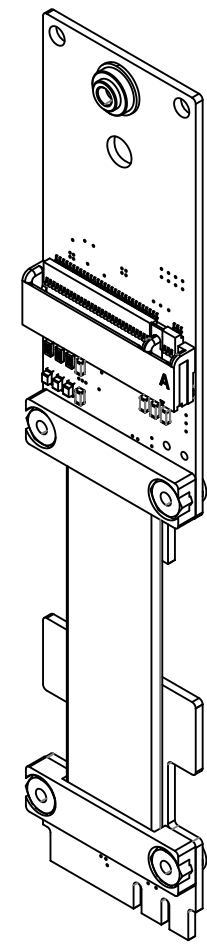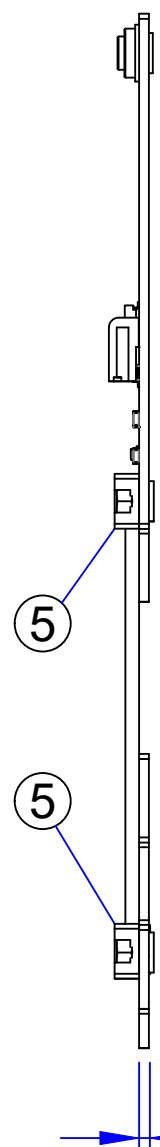

3D VIEW

NOTE
 1.100% PCIe 3.0x1 8Gb/s TEST.
 2.DIMSION MARK "▼" BY QC CHECK.

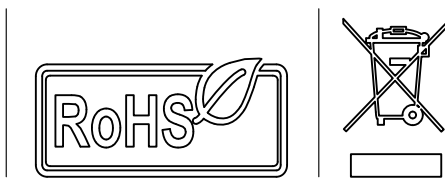

R55SF-3cm	30±5
R55SF-5cm	50±5
R55SF-10cm	100±5
R55SF-15cm	150±5
R55SF-20cm	200±10
R55SF-25cm	250±10
R55SF-30cm	300±20
R55SF-40cm	400±20
R55SF-50cm	500±20
R55SF-80cm	800±30
Part-Number (L)	Length (mm)

ADT-LINK

No.	PART NO.	DESCRIPTION	Q'TY
6	Connector	M.2 Key A connector 3mm thickness	1Pcs
5	PAD	3mm thickness FR4 PCB PAD	1Pcs
4	Screw	M2 screw & hex nut	2Set
3	Tape	Acetate cloth tape	2Pcs
2	Stand Off	M2 Stand Off	1Pcs
1	CABLE	CABLE,(WIRE20P=30AWG×12P,28AWG×8P),PE ;JACKET:BLACK,OD=1.4×13.2mm (95±15Ω),TPE	1Pcs

TITLE: M.2 Key A.E. Extension CABLE L=3~80cm		DWG NO.: ADT-R5S-R5F-001	
		CUSTOMER NO.: ADT	
		CUSTOMER P/N: R55SF-xxxxcm	
	SCALE NONE	UNIT mm	CUS REV. 1.0
			HY REV. 1.0
			DATE 2020-06-26
			SHEET 1/1
DRAWING/制图 Gwydion		CHECKED/审核	
APPROVED/核准			